


- ▶ obudowa: tworzywo sztuczne
- ▶ casing: plastic



maximum movement detection range is 10m / maximum horizontal operation angle for movement sensor is 360° / maximum vertical operational angle for movement sensor is 120° / possibility of fitting lighting time control from 15s to 10min / setting ambient illumination level at which the equipment operates

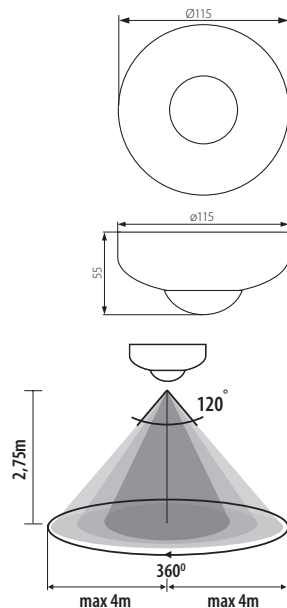

- ▶ obudowa: tworzywo sztuczne
- ▶ casing: plastic



maximum movement detection range is 5m / maximum horizontal operation angle for movement sensor is 360° / maximum vertical operational angle for movement sensor is 120° / possibility of fitting lighting time control from 5s to 6min / setting ambient illumination level at which the equipment operates / resistive load is max 2000W, inductive load is max 600W

